


UT1B/GW-0ESYIO

cylindrical ultrasonic



Micro Detectors

Italian Sensors Technology

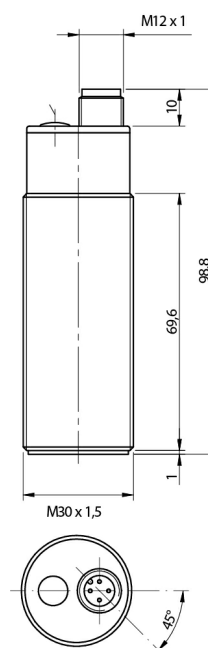

Detection properties

Nominal sensing distance	3500mm
Thermal drift of Sr	±5%
Repeat Accuracy	0,1%valore fondoscala
Beam angle	12° ± 2°
Resolution	0,1%valore fondoscala
Sensitivity adjustment	Teach-in button
Hysteresis	1% valore fondoscala
thermal compensation	Si
Minimum sensing distance (blind zone)	250mm
Linearity error	1% valore fondoscala

Application

Function Principle

Diffuse reflection

Outputs

Output type

IO-Link/ 2x PNP

Output Function	NO/NC multifunctions
Switching frequency	1Hz
Response time	1s

Electrical data

Operating Voltage	10 - 30Vdc
No-Load supply current	25mA
Load current	100mA
Leakage current	≤ 10µA @ 30Vdc
Output voltage drop	2,2V max @ IL=100mA
Max ripple content	5%
LED indicators	Verde: Eco - Giallo: Uscita
Time delay before availability	≤400ms
Short-circuit protection	Sì
Reverse Polarity Protection	Sì
Impulsive Overvoltage Protection	Sì

Mechanical data

Dimensions	M30 x 1,5 / L = 98mm
Weight	140g
Housing Material	PBT
Connections	M12 Plug
Tightening torque	1,5Nm
Operating temperature	-20°C...+70°C
Storage temperature	-30°C...+80°C
Transducer Frequency	112KHz
Diameter/Dimension	M30

Test/Approvals

Approvals	CE cULus
EMC compatibility	IEC 60947-5-2
Shocks and vibrations	IEC EN 60947-5-2 / 7.4
Degree of protection	IP67

Accessories

Supplied Accessories	2 x M30x1,5 dadi, 2 rosette Ø 30
----------------------	----------------------------------

M.D.Micro Detectors S.p.A.

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail info@microdetectors.com

date of printing

03/04/2020 04:48:45