


UT5L/GW-1ESYIO

cylindrical ultrasonic



Micro Detectors

Italian Sensors Technology

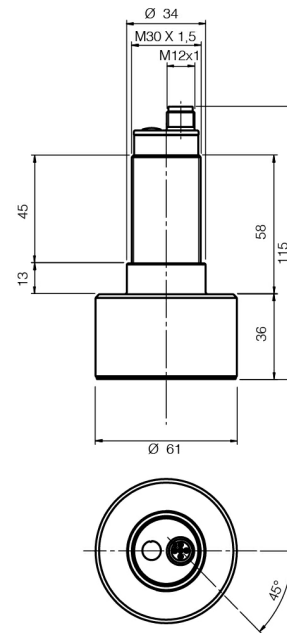

Detection properties

Nominal sensing distance	8000mm
Thermal drift of Sr	±5%
Repeat Accuracy	1% valore fondoscala
Beam angle	10° ± 2°
Resolution	1% valore fondoscala
Sensitivity adjustment	Teach-in button
Hysteresis	1% valore fondoscala
thermal compensation	Sì
Minimum sensing distance (blind zone)	600mm
Linearity error	1% valore fondoscala

Application

Function Principle Diffuse reflection

Outputs

Output type IO-Link/ 2x PNP

Output Function NO/NC multifunctions

Switching frequency 1Hz

Response time	1s
---------------	----

Electrical data

Operating Voltage	10 - 30Vdc
No-Load supply current	25mA
Load current	100mA
Leakage current	≤ 10μA @ 30Vdc
Output voltage drop	2,2V max @ IL=100mA
Max ripple content	5%
LED indicators	Verde: Eco - Giallo: Uscita
Time delay before availability	≤400ms
Short-circuit protection	Sì
Reverse Polarity Protection	Sì
Impulsive Overvoltage Protection	Sì

Mechanical data

Dimensions	ø 61mm / L = 115mm
Weight	400g
Housing Material	AISI316L
Connections	M12 Plug
Tightening torque	100Nm
Operating temperature	-20°C...+70°C
Storage temperature	-30°C...+80°C
Transducer Frequency	40KHz
Diameter/Dimension	M30

Test/Approvals

Approvals	CE cULus
EMC compatibility	IEC 60947-5-2
Shocks and vibrations	IEC EN 60947-5-2 / 7.4
Degree of protection	IP67

Accessories

Supplied Accessories	2 x M30x1,5 dadi
----------------------	------------------

M.D.Micro Detectors S.p.A.

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail info@microdetectors.com

date of printing

03/04/2020 05:20:40