




# Operation Manual

## eYc SD05 Integrated Signal Indicator




eYc SD05



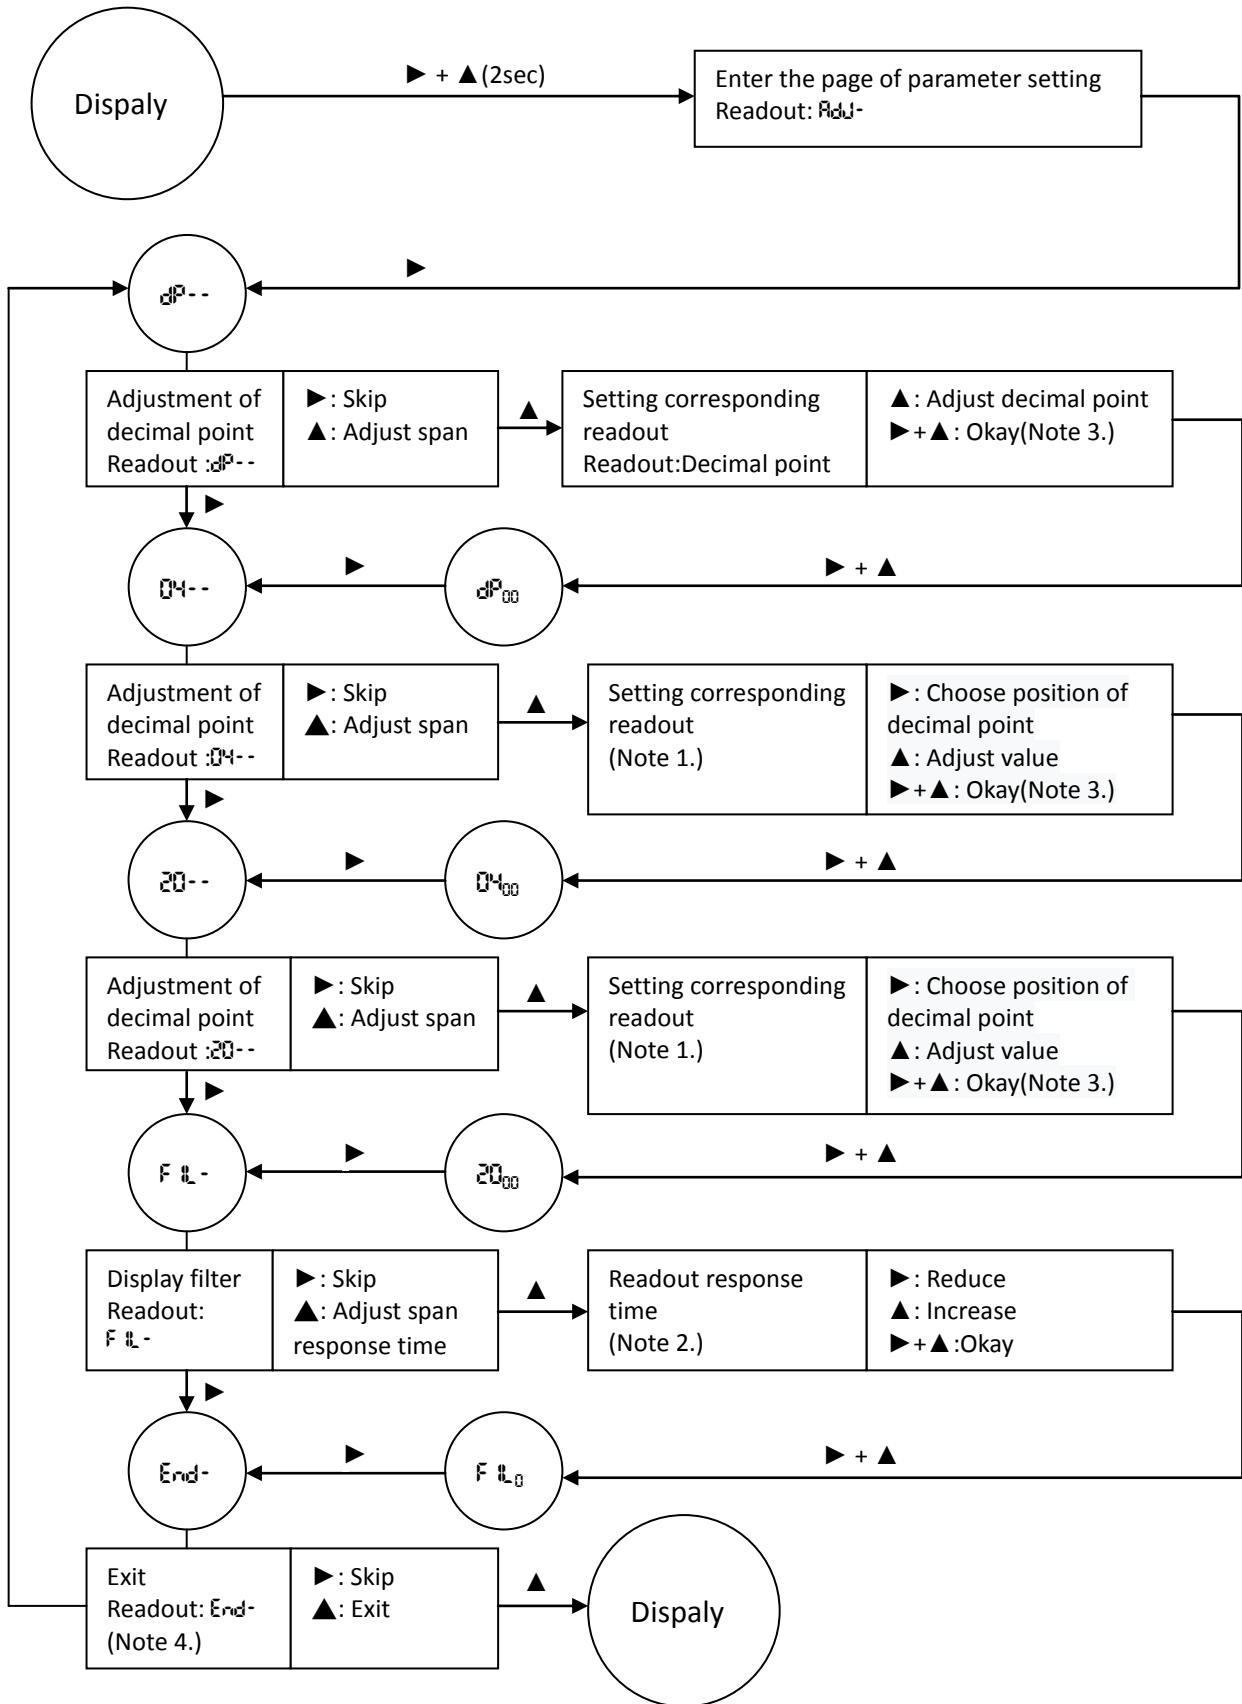

**Note 1.**

- A) Readout decimal point that you set.
- B) Adjustment range: -1999 ... 9999.

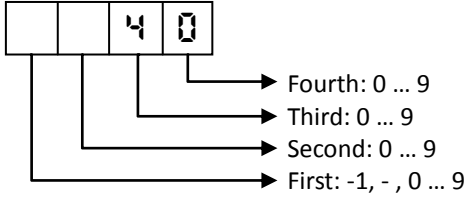

- C) Default:  
4mA corresponding 400  
20mA corresponding 2000

**Note 2.**

- A) Adjustment of readout's response time. 0.5s/ Unit.
- B) The range of response time: ( 0s ... 20s)
- C) Default: 0s (s: second)


**Note 3.**

To save, please press ►+▲ at the same time after you finished setting, and then it will skip to next parameter.


**Note 4.**

If you didn't press any key over 20s during setting, it will exit setting program and return to main manual without save.

**Diagram**

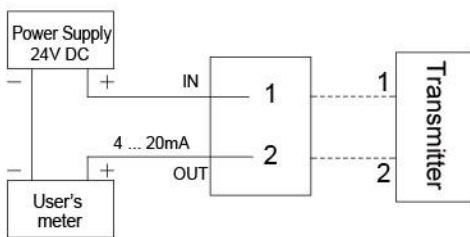

DIN43650 Connector

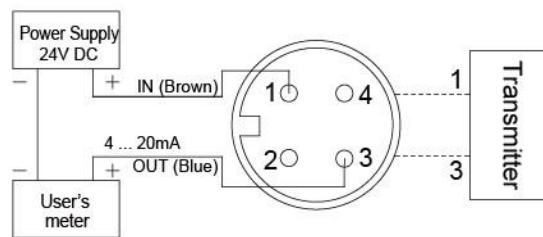

M12 Connector

# Accurate | Professional | Stable

Temperature and Humidity / Dew Point / Air Velocity / Flow / Pressure

Measuring Specialist



Tel.: 886-2-8221-2471  
Web : [www.eyc-tech.com](http://www.eyc-tech.com)  
e-mail : [info@eyc-tech.com](mailto:info@eyc-tech.com)